


South Building

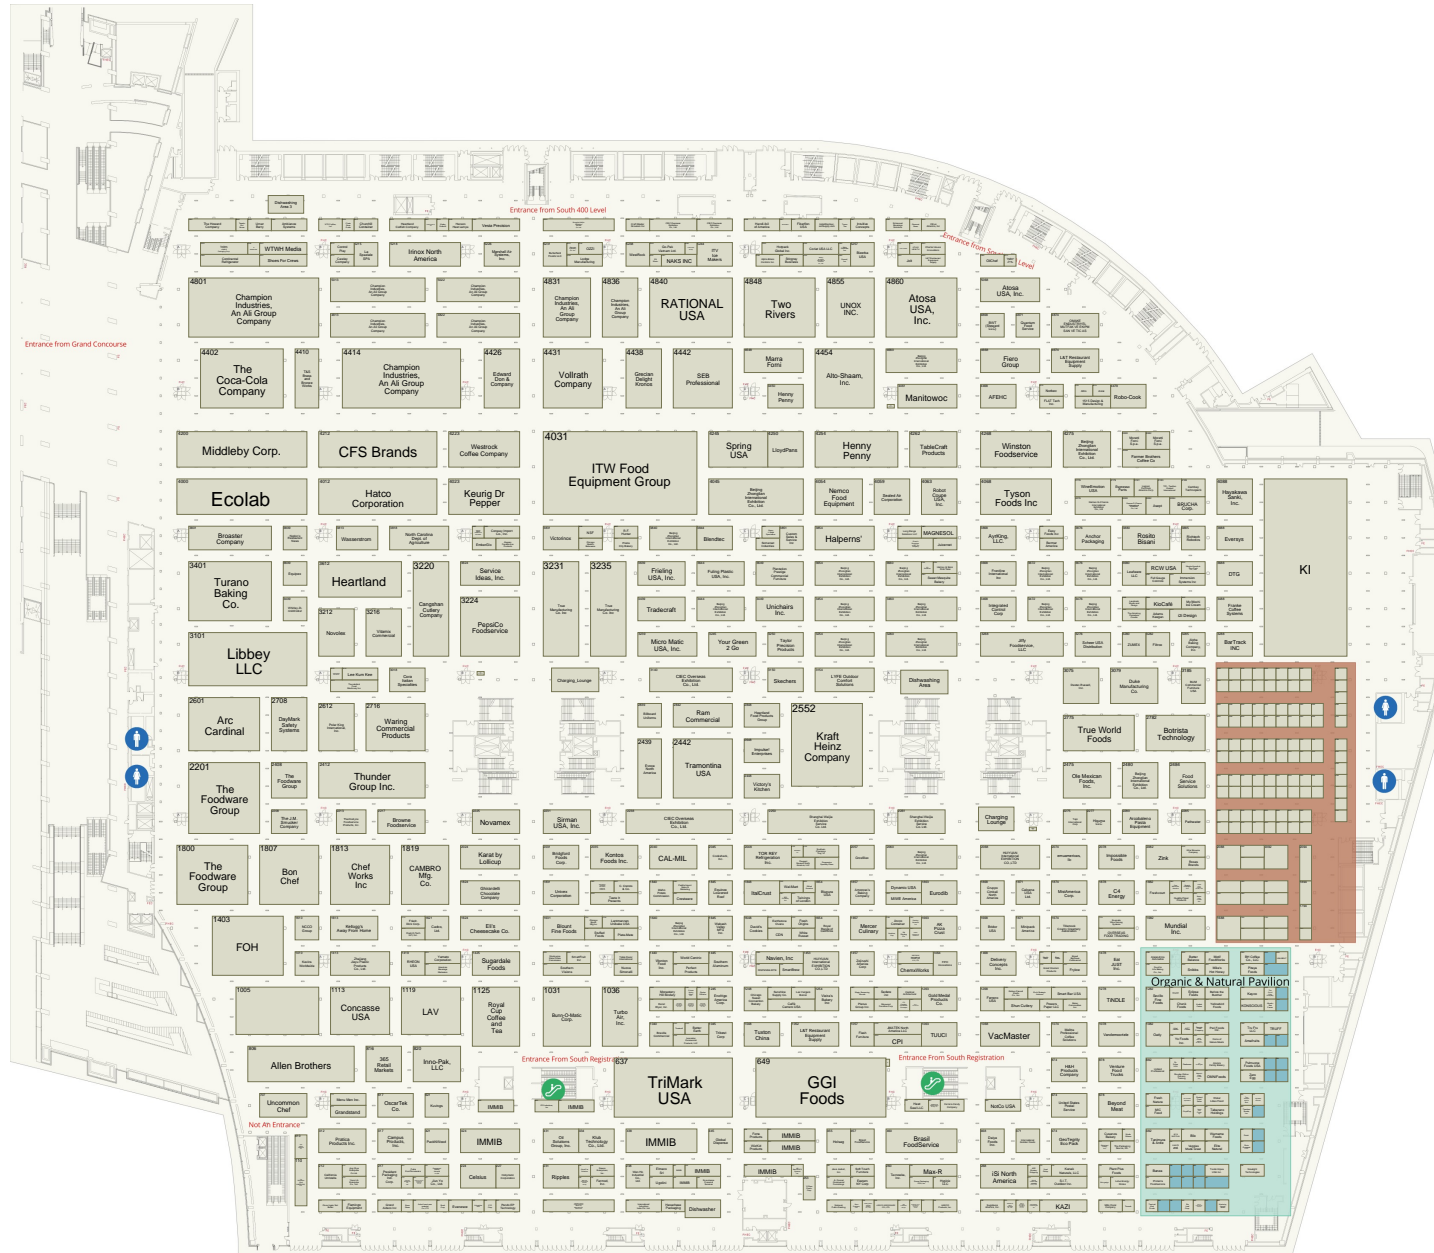

FLOOR PLAN GENERAL NOTES

- FHCE - FIRE HOSE & EXTINGUISHER CAB
- FHC - FIRE HOSE CABINET
- FEC - FIRE EXTINGUISHER CABINET
- FHR - FIRE HOSE RACK
- FX - FIRE EXTINGUISHER
- EE - EMERGENCY EXIT
- SC - SECURITY CAMERA
- DF - DRINKING FOUNTAIN

- EXHIBIT HALL:
- CEILING HEIGHT 40'
 - FLOOR LOAD - 400# PER SQ. FT.

- GRAND CONCOURSE LOBBY:
- CEILING HEIGHT 138'40"
 - FLOOR LOAD - 100# PER SQ. FT.

2 MANDATORY 20' AISLES MUST RUN E & THROUGH FOOD PODS (UNLESS APPROX MCCORMICK PLACE)

ALL DRAPE LINES ARE SUBJECT TO CHA PER ON-SIGHT FIRE MARSHAL APPROVA

FLOOR PORTS LEGEND

- MECHANICAL FLOOR PORTS (EVERY 30' ON CENTER)
- 4" DRAIN FLUSH W/ FLOOR
 - 1" DOMESTIC WATER 60 PSI
 - 1" COMPRESSED AIR 100PSI
 - 1" NATURAL GAS 1 PSI


- ELECTRICAL FLOOR PORTS (EVERY 15'x30' ON CENTER)
- TYPE A
- 120V, SINGLE, 15 AMP
 - 208V, THREE, 30 AMP
 - 480V, THREE, 100 AMP
- TYPE B
- 120V, SINGLE, 15 AMP
 - 208V, THREE, 30 AMP
 - 208V, THREE, 60 AMP
- TYPE C
- 120V, SINGLE, 15 AMP
 - 208V, THREE, 30 AMP

INDIVIDUAL COLUMN DETAILS

- SINGLE COLUMN
- BASE COVER 79" x 79" x 98-1/2" HIGH
- SPLIT COLUMN
- BASE COVER 102" x 79" x 98-1/2" HIGH

FHC MUST HAVE TOTAL ACCESS WATER VALVES MUST HAVE LIMITED AC

FIRE STROBE SITS ON TOP OF EACH SID COLUMN BASE (98" HIGH FROM THE FLC ALL DOORS SWING OPEN 42"



ACCESS DEFINITIONS

TOTAL ACCESS

ENTIRE DOOR MUST BE COMPLETELY CLE NEAREST AISLE IN A DIRECT LINE AND COMPLETELY VISIBLE AT ALL TIMES

LIMITED ACCESS

NO IMPEDIMENTS OR OBSTRUCTIONS MA PLACED WITHIN THE 42" CLEARANCE ARE WHICH PROHIBIT THE COLUMN DOORS FF OPENING QUICKLY AND COMPLETELY 42" LIGHTWEIGHT ITEMS SUCH AS CHAIRS, ETC. ARE PERMISSIBLE AS WELL AS DRAF PROVIDED THEY CAN BE MOVED QUICKLY ONE PERSON, AND DO NOT PREVENT THE DOORS FROM FULLY OPENING